


GTLED

LED Troffers

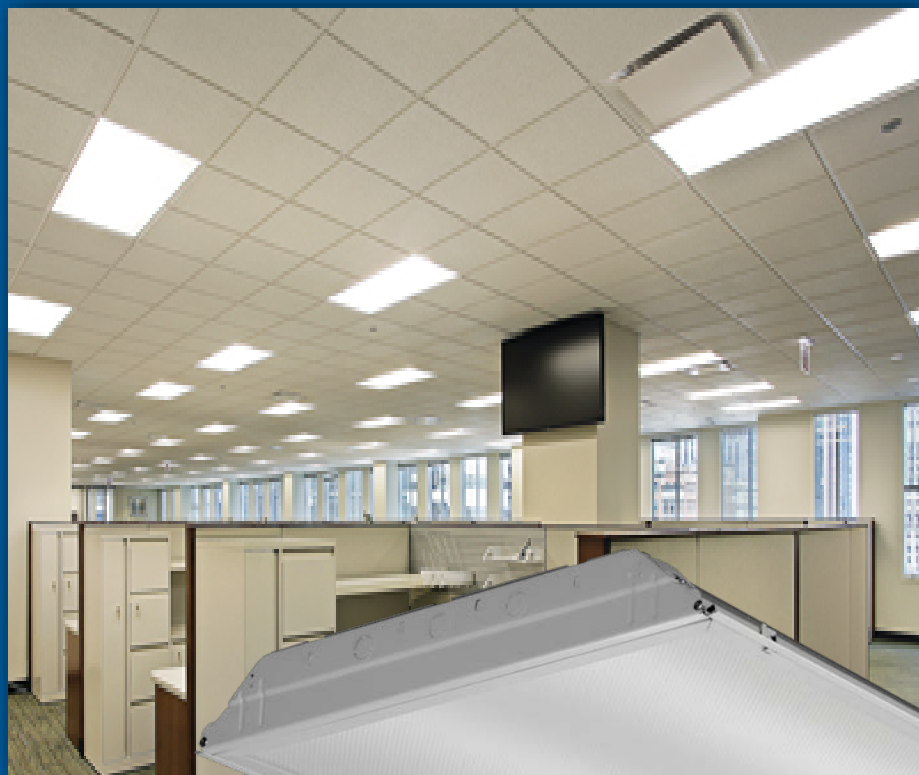

eldoLED

GTL Upgrade

WHAT'S NEW?

NEW 1x4

GTL 1x4 now available through Contractor Select and Configurable Product

NEW DRIVER OPTIONS

eldoLED 1% dim now a standard option on the GTL Configurable product
Step Level dimming (SLD) also available

NEW CONTROL OPTION

Optional embedded XPoint Wireless Controller dims to 1%



AGGRESSIVELY PRICED

The GTLED has closed the price gap between fluorescent and LED. Providing dimming as standard at similar price as dimming fluorescent today!!



FAMILIAR LOOK

The GTLED provides the look of an existing fluorescent troffer.




ENERGY SAVINGS

Typical savings of 32-47% over T8 linear fluorescent and even more savings when replacing T12.

Size	Watts	Lumens*	LPW
1x4	40.1W	3750 & 3983	93, 98
2x2	39.6W	3704 & 3883	93, 98
2x4	38.9W	4103 & 4290	105, 110

*3500 and 4000K CCT.

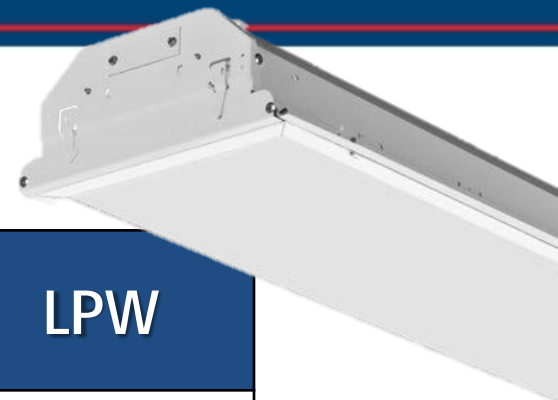

Lumen Package	Watts	Lumens*	LPW
20L	20.5W	1954-2169	101-113
33L	35.2W	3242-3644	93-102
40L	40.1W	3572-4026	89-100
48L	46.46W	4280-4822	92-103

*Lumens vary based on CCT chosen.



Lumen Package	Watts	Lumens*	LPW
20L	19.6W	1981-2215	101-113
33L	35.4W	3300-3645	93-102
40L	39.6W	3530-3994	89-100

*Lumens vary based on CCT chosen.



Lumen Package	Watts	Lumens*	LPW
30L	30.5W	2664-2994	87-98
40L	38.9W	3910-4393	100-112
48L	46.9W	4583-5164	97-110
60L	54.8W	5173-5849	94-106
72L	71W	6731-7538	94-106

*Lumens vary based on CCT chosen.

GTL Configurable Specifications

CCT	3000K, 3500K, 4000K, 5000K
LED LUMEN MAINTENANCE	<i>Improved</i> - L90 / 60,000 hrs
LUMEN PACKAGES	(1x4) 2000-4800 Lumens; (2x2) 2000 – 4000 Lumens; (2x4) 3000-7500 Lumens
WATTAGE RANGE	(1x4) 21-46W; (2x2) 20-40W; (2x4) 31-71W
DRIVER DIMMING LEVEL	0-10V dimming – Standard eldoLED Dimming 1%
OPTIONAL DRIVER OPTIONS	Step Level Dimming (SLD)
LENS TYPE	Frosted A12, Frosted A19, and SWL (Satin White)
SERVICEABILITY	Replaceable/upgradeable LED Boards and Drivers
VOLTAGES	MVOLT (120-277), 347V
CHANNEL AND END PLATES	Steel Channel and end plates
CONTROL OPTIONS	XPoint Wireless Controller paired with an eldoLED 1% dimming driver
WARRANTY	5-Year Limited Warranty

eldoLED



EZ1

eldoLED Dimming 1%



SLD

Step Level Dimming

New Ordering Tree

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: 2GTL 2 33L EZ1 LP835

Series	Length	Trim type	Lumens ¹	Door	Lens	Voltage	Driver	Color temperature
2GTL 2' wide recessed LED luminaire	2 2'	(blank) Grid F Overlapping flange	20L 2000 lumens	(blank) Flush steel, white	(blank) #12 pattern acrylic, 0.125" thick	(blank) MVOLT (120-277V)	EZ1 eldoLED dims to 1% SLD Step-level dimming ³ EXA1 eldoLED dims to 1%, XPoint wireless enabled	LP830 3000 K
			33L 3300 lumens	FN Flush aluminum, natural	A19 #19 pattern acrylic	120 120V		LP835 3500 K
			40L 4000 lumens	FM Flush aluminum, matte black	SWL Satin white	277 277V		LP840 4000 K
				FW Flush aluminum, white		347 347V ²		LP850 5000 K
				RN Regressed aluminum, natural				
				RM Regressed aluminum, matte black				
				RW Regressed aluminum, white				







Controls ³		Options	
(blank)	No controls	EL7L	700 lumen emergency battery
N80	nLight with 80% (L80) lumen management	EL14L	1400 lumen emergency battery
N80EMG	nLight with 80% (L80) lumen management for use with generator supply emergency power	CP	Chicago plenum
N100	nLight without lumen management	PWS1836	6' pre-wire, 3/8" diameter, 18-gauge, 1-circuit
N100EMG	nLight without lumen management for use with generator supply emergency power	PWS1846	6' pre-wire, 3/8" diameter, 18-gauge, 2-circuit
		ABC	Door frame gasketing ⁴
		GLR	Slow-blowing fuse ⁵
		GMF	Fast-blowing fuse ⁵
		LATC	Earthquake clip
		NPLT	Narrow pallet
		PAF	Paint after fab

New Nomenclature:













Driver section now added requiring EZ1, SLD, or EXA1. NX no longer required.

Broad Range of LED Products












LENSED TROFFERS

	Source(s)	Distribution	Companion Product	Controls	RELIGHT
 GT Series	LED & Fluorescent		LBL		
 T Series	LED		Surface Mount		

ARCHITECTURAL

	Source(s)	Distribution	Companion Product	Controls	RELIGHT
 FSL Series	LED				
 AC Series	LED		Surface Mount		
 SBS Series	LED & Fluorescent		Surface Mount		
 AL Series	LED & Fluorescent		1'x4', Surface Mount		

VOLUMETRIC ARCHITECTURAL

	Source(s)	Distribution	Companion Product	Controls	RELIGHT
 VT Series	LED & Fluorescent		ST Series, W Series, Surface Mount		
 RT Series	LED & Fluorescent		ST Series, W Series, Surface Mount		
 Breez™ Series	LED				

Distribution Key:
 L = Lambertian
 V = Volumetric